

## **Spezifikation**

- Eingangs Impedanz 47k ohm Ausgangsleistung (RMS) 30 W Frequenz

Lautsprecher 150Hz ~ 20kHz

- Subwoofer 50Hz~200Hz Lautsprecher 3", 4 ohm Woofer 4", 6 ohm
- Stromversorgung 220V
- 50Hz Lautsprecher 90x152x91 (BxHxT)
- Subwoofer 125x175x220 (BxHxT)



USER MANUAL



·]]]



S-108

C108





Achtung -----

Schützen Sie das Gerät vor Hitze Die Fläche sollte stabil sein, um Fallschäden zu vermeiden

Öffnen Sie niemals das Gehäuse - Elektro-Schock Gefahr! Reparaturen dürfen nur von qualifizierten Technikern durchgeführt werden

Trennen Sie unverzüglich vom Stromversogung, sobald Sie Beschädigungen oder Feuchtigkeit am Gerät bemerken


Maximieren Sie keinenfalls die Lautstärke. Bei Endgeräten mit eingebauten Verstärker kann der Subwoofer übersteuern und beschädigt werden.

Nur im Innen-Bereich einsetzen!

Sollten Sie das Gerät für einige Tage nicht benutzen, so trennen Sie bitte die Stromversorgung





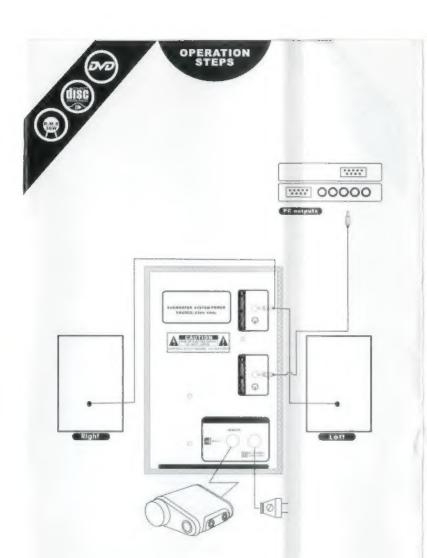



## WARNING

Don't place the product in the high temperature. Moist and place the product on a secure, stable surface.

The product can cause serious damage if it fall.

Never open the product by yourself. It is an electrical shock hazards. If the repair is needed. It should be done by qualified electrician.

Take out all power cords immediately and use the product is damaged or water enter into the product with carelessness.

Do not maximize the volume when it is connected with the equipment which has output power. It causes sound it distortion.

Use the product only in indoor.

Unplug the power outlet, if you won't use for two days.







## CE Attestation of Conformity

Discol line: Augus 2 2005 Abboom Number RSDM67291-1, RSZM172211.2

first. Area Compliance Cathoridory Corporation (BACL) hereby declares that scatter has been immplied and reports have been generated for:

Shiffmedia Spenker

C108

SASHIABA AUDIO (SOFENZIOS) CO. LTD.

A Dubbing Dext ProcyCorp Indoors Park, Quarter Road, XXV.org. Tree, Bar-by York, Section 9 8, 1 from

And, in admittance with the following Applicable December.

20 Chart Clearanaguette Compatibility on opended)

This product has been assumed agents the following Applicable Sandara.

FN 48012 [009:4] | 1000: 43: 100] EN 98034 [099+A4: 1801+A2: 1803 EN 61000 3-2: 2000 & EN 61000-3-3: 1005 (A.1: 200)



USER MANUAL




·]]] ••••• Audio Input



ACTIVE MULTIMEDIA SUBWOOFER SYSTEM

S-108



## SPECIFICATION

- Input impedance -47k ohm
  Output -R.M.S -30 W
  Frequency Responce Satellite Unit -150Hz~20kHz Subwoofer-50Hz~200Hz
- Satellite unit -3" |4 ohm woofer-4" |6 ohm
  Powdr input -ac 220V 50Hz
  Woofer size -125x175x220(WXHXD)
  Satellite size -90x152x91(WXHXD)

C108